


HiMAX 5

# 480~505W

182mm Cells Mono  
PERC with MBB & Half-cut  
Technology

## Quality Guarantee

12-year Warranty for Materials and Processing  
25-year Warranty for Extra Linear Power Output

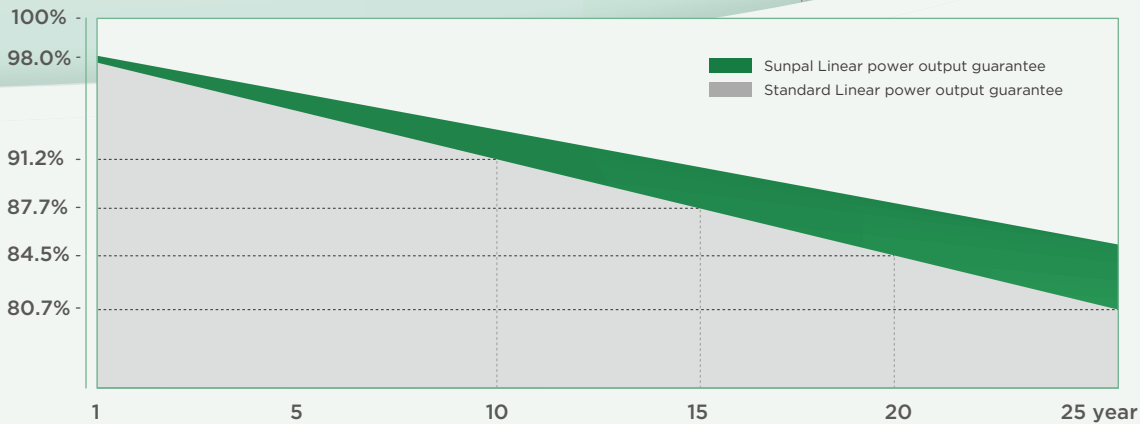

21.30%  
Max Module Eff.

0~+5W  
Positive Tolerance

### Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730  
ISO 9001:2008: ISO Quality Management System  
ISO 14001: 2004: ISO Environment Management System  
OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. Sunpal Solar reserves the right of interpretation.

Positive power tolerance (0~+5W) guaranteed

High module conversion efficiency (up to 21.30%)

Slower power degradation enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection

Reduced resistive loss with lower operating current

Higher energy yield with lower operating temperature


Reduced hot spot risk with optimized electrical design and lower operating current



Add: West Changjiang Road, Shushan District, Hefei City, Anhui Province, China.  
Email: info@sunpalsolar.com Tel: +86 551 6586 5992  
WhatsApp: +86 180 5513 2023 Web: www.sunpalsolar.com

Q Sunpal Solar

Design (mm)

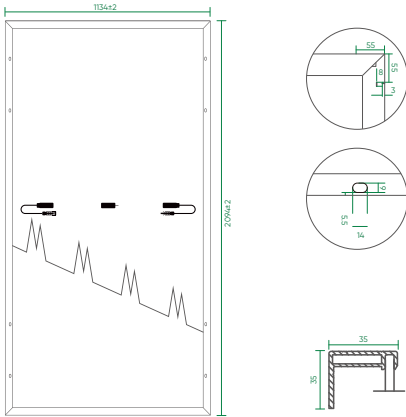

\*Units: mm \*Tolerance: ±2mm

<b>Cell Orientation</b>	132 (6x22)
<b>Junction Box</b>	IP68, three diodes
<b>Output Cable</b>	4mm <sup>2</sup> , 300mm in length, length can be customized
<b>Glass</b>	Single glass 3.2mm coated tempered glass
<b>Frame</b>	Anodized aluminum alloy frame
<b>Weight:</b>	26.3kg±3%
<b>Dimension</b>	2094x1134x35mm
<b>Packaging</b>	31pcs per pallet 682pcs per 40'ft Container

<b>Operational Temperature</b>	-40°C~+85°C
<b>Power Output Tolerance</b>	0~+5W
<b>Voc &amp; Isc Tolerance</b>	±3%
<b>Max. System Voltage</b>	DC1500V(IEC/UL)
<b>Max. Series Fuse Rating</b>	25A
<b>NOCT</b>	45±2°C
<b>Safety Class</b>	II
<b>Fire Rating</b>	UL type 1 or 2
<b>Max. Static Load(Front)</b>	5400Pa
<b>Max. Static Load(Back)</b>	2400Pa

Electrical Characteristics

Model Number	SP480M-66H		SP485M-66H		SP490M-66H		SP495M-66H		SP500M-66H		SP505M-66H	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
<b>Maximum Power (Pmax/W)</b>	480	363	485	367	490	370	495	374	500	378	505	382
<b>Open Circuit Voltage (Voc/V)</b>	45.07	42.15	45.20	42.30	45.33	42.43	45.46	42.58	45.59	42.72	45.72	42.86
<b>Short Circuit Current (Isc/A)</b>	13.65	10.99	13.72	11.06	13.79	11.13	13.86	11.20	13.93	11.27	14.00	11.34
<b>Voltage at Maximum Power (Vmp/V)</b>	37.62	35.54	37.81	35.67	37.99	35.76	38.17	35.84	38.35	35.93	38.53	36.02
<b>Current at Maximum Power (Imp/A)</b>	12.76	10.21	12.83	11.06	12.90	11.13	12.97	11.20	13.04	11.27	13.11	11.34
<b>Module Efficiency(%)</b>	20.3		20.4		20.6		20.8		21.1		21.3	
<b>Temperature Coefficient of Isc</b>												+0.045%/°C
<b>Temperature Coefficient of Voc</b>												-0.275%/°C
<b>Temperature Coefficient of Pmax</b>												-0.350%/°C

\* STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Spectra at AM1.5

\* NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

\*Test uncertainty for Pmax: ±3%

I-V Curve

